


Aluminum Capacitors



FEATURES

- Polarized aluminum electrolytic capacitors
- SMD Style
- High CU-product
- Miniature dimension
- Reflow soldering
- Packaging: blistertape on reel
- Lead (Pb)-free


RoHS*
 COMPLIANT

APPLICATIONS

- General Use
- Consumer Electronics
- Low-headroom, height restricted low mass units
- Filtering, smoothing, coupling

QUICK REFERENCE DATA	
DESCRIPTION	VALUE
Nominal case sizes D × L (in mm)	(3) 4 × 5.3 to 10 × 10
Rated capacitance range, C _R	0.1 to 1500 μF
Tolerance on C _R	± 20 %
Rated voltage range, U _R	4 to 100 V
Category temperature range	- 40 to + 85 °C
Endurance test at upper category temperature	2000 hours
Lifetime at 85 °C and I _R	2500 hours
Lifetime at 40 °C and I _R	60 000 hours
Failure rate	≤ 100 [10 ⁻⁹ /h]
Based on sectional specification	IEC 60384-4 EN 130 300
Detail specifications	
Climatic category	
IEC 60068	40/085/56

SELECTION CHART FOR C _R , U _R AND RELEVANT NOMINAL CASE SIZES (D × L in mm)									
C _R (μF)	U _R (V)								
	4	6.3	10	16	25	35	50	63	100
0.1	-	-	-	-	-	-	(3) 4 × 5.3	-	-
0.22	-	-	-	-	-	-	(3) 4 × 5.3	-	-
0.33	-	-	-	-	-	-	(3) 4 × 5.3	-	-
0.47	-	-	-	-	-	-	(3) 4 × 5.3	-	-
0.68	-	-	-	-	-	-	(3) 4 × 5.3	-	-
1.0	-	-	-	-	-	-	(3) 4 × 5.3	-	-
1.5	-	-	-	-	-	-	4 × 5.3	-	-
2.2	-	-	-	-	-	-	4 × 5.3	-	-
3.3	-	-	-	-	-	-	4 × 5.3	-	6.3 × 5.8
4.7	-	-	-	-	4 × 5.3	4 × 5.3	4 × 5.3	-	6.3 × 5.8
	-	-	-	-	-	-	5 × 5.3	-	8 × 6.2
6.8	-	-	-	-	4 × 5.3	4 × 5.3	5 × 5.3	-	-
	-	-	-	-	-	5 × 5.3	-	-	-
10	-	-	-	-	4 × 5.3	4 × 5.3	5 × 5.3	8 × 6.2	8 × 10
	-	-	-	-	5 × 5.3	5 × 5.3	6.3 × 5.3	-	-
15	-	-	-	4 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.3	-	-
	-	4 × 5.3	4 × 5.3	4 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.3	8 × 10	8 × 10
22	-	-	5 × 5.3	5 × 5.3	6.3 × 5.3	-	-	-	-
	4 × 5.3	4 × 5.3	4 × 5.3	5 × 5.3	5 × 5.3	6.3 × 5.3	8 × 6.2	8 × 10	10 × 10
33	-	5 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.3	-	6.3 × 7.7	-	-
	4 × 5.3	4 × 5.3	5 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.8	6.3 × 7.7	8 × 10	10 × 10
47	-	5 × 5.3	6.3 × 5.3	6.3 × 5.3	-	8 × 6.2	8 × 10	-	-
	5 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.3	8 × 6.2	6.3 × 7.7	8 × 10	-	-
68	5 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.3	8 × 6.2	6.3 × 7.7	8 × 10	-	-

* Pb containing terminations are not RoHS compliant, exemptions may apply


SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES (D × L in mm)									
C_R (μF)	U_R (V)								
	4	6.3	10	16	25	35	50	63	100
100	5 × 5.3	5 × 5.3	6.3 × 5.3	6.3 × 5.3	6.3 × 7.7	6.3 × 7.7	8 × 10	10 × 10	-
	-	6.3 × 5.3	-	8 × 6.2	8 × 6.2	8 × 10	10 × 10	-	-
150	-	-	6.3 × 5.8	6.3 × 7.7	8 × 10	8 × 10	10 × 10	-	-
	-	-	-	8 × 6.2	-	10 × 10	-	-	-
220	6.3 × 5.3	6.3 × 5.8	6.3 × 7.7	6.3 × 7.7	8 × 10	8 × 10	-	-	-
	-	8 × 6.2	8 × 6.2	8 × 10	10 × 10	10 × 10	-	-	-
330	-	6.3 × 7.7	8 × 10	8 × 10	8 × 10	10 × 10	-	-	-
	-	8 × 6.2	-	10 × 10	10 × 10	-	-	-	-
470	6.3 × 7.7	8 × 10	8 × 10	10 × 10	10 × 10	-	-	-	-
	-	-	10 × 10	-	-	-	-	-	-
680	8 × 10	8 × 10	10 × 10	10 × 10	-	-	-	-	-
1000	-	10 × 10	10 × 10	-	-	-	-	-	-
1500	-	10 × 10	-	-	-	-	-	-	-

Note


- 1. Case size 3 x 5.3 is available on request

DIMENSIONS in millimeters							
CASE SIZE CODE	D	H	B	C	E	A	H
AA	3	5.3	3.3	3.3	0.8	1.5	0.5 ~ 0.8
AB	4	5.3	4.3	4.3	1.0	1.9	0.5 ~ 0.8
AC	5	5.3	5.3	5.3	1.4	2.3	0.5 ~ 0.8
AD	6.3	5.3/5.8	6.6	6.6	2.2	2.4	0.5 ~ 0.8
BM	6.3	7.7	6.6	6.6	2.2	2.4	0.5 ~ 0.8
AE	8	6.2	8.3	8.3	2.3	3.3	0.5 ~ 0.8
AF	8	10	8.3	8.3	3.1	2.9	0.8 ~ 1.1
AG	10	10	10.3	10.3	4.5	3.2	0.8 ~ 1.1

CASE SIZE 3 x 5.3 to 8 x 6.2

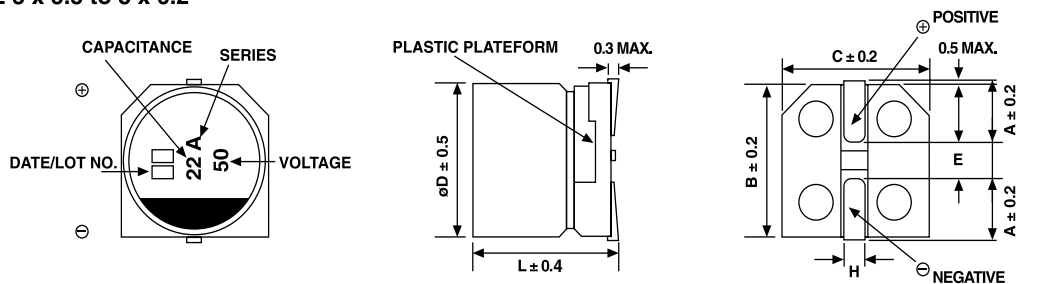

CASE SIZE 8 x 10 and 10 x 10

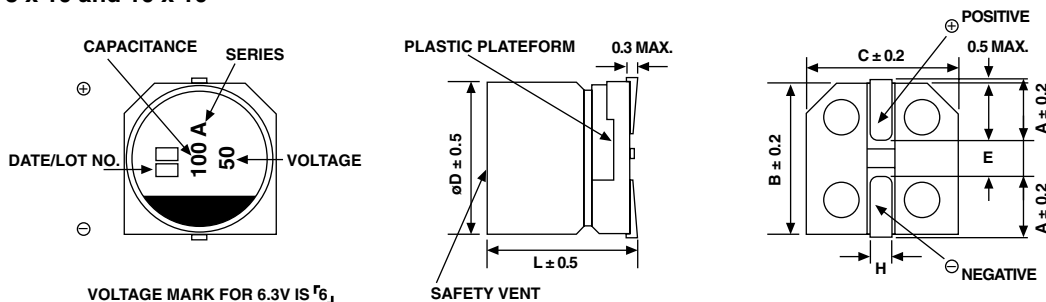



ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	Rated capacitance at 120 Hz
U_R	Rated voltage
Tan δ	Max. dissipation factor at 120 Hz
R_{ESR}	Max. equivalent series resistance at 120 Hz
I_R	Rated alternating current at 120 Hz and upper category temperature

Note

- Unless otherwise specified, all electrical values apply at $T_{amb} = 20\text{ }^\circ\text{C}$, $P = 80$ to 120 kPa , $RH = 45$ to 75% .

ORDERING EXAMPLE

ECA 10 μF / 25 V, $\pm 20\%$

Size: 5 mm x 5.3 mm

Ordering Code: ECA00AC210EA0□

The 14th place (□), not indicated in the following table, is an inter-company code.

RoHS/Lead (Pb)-free

If you need "RoHS" compliant parts please replace the 13th figure "0" of the Part Number through "R".

example: ECA00AB233AAR□

ELECTRICAL DATA AND ORDERING INFORMATION						
U_R (V)	C_R 120 Hz (μF)	DIMENSIONS D x L (mm)	TAN δ 120 Hz	R_{ESR} 120 Hz (Ω)	I_R 120 Hz/85 $^\circ\text{C}$ (mA)	CATALOG NUMBER PART NUMBER*
4	33	4 x 5.3	0.40	16.4	27	ECA00AB233AA0□
	47	4 x 5.3	0.40	11.5	32	ECA00AB247AA0□
	68	5 x 5.3	0.40	8.0	44	ECA00AC268AA0□
	100	5 x 5.3	0.40	5.4	54	ECA00AC310AA0□
	220	6.3 x 5.3	0.40	2.5	93	ECA00AD322AA0□
	470	6.3 x 7.7	0.40	1.2	115	ECA00BM347AA0□
	680	8 x 10	0.40	0.8	200	ECA00AF368AA0□
6.3	22	4 x 5.3	0.30	18.5	24	ECA00AB222BA0□
	33	4 x 5.3	0.30	12.3	30	ECA00AB233BA0□
	33	5 x 5.3	0.30	12.3	41	ECA00AC233BA0□
	47	4 x 5.3	0.30	8.6	36	ECA00AB247BA0□
	47	5 x 5.3	0.30	8.6	48	ECA00AC247BA0□
	68	5 x 5.3	0.30	6.0	50	ECA00AC268BA0□
	100	5 x 5.3	0.30	4.1	60	ECA00AC310BA0□
	100	6.3 x 5.3	0.30	4.1	82	ECA00AD310BA0□
	220	6.3 x 5.8	0.30	1.9	91	ECA00AD322BA0□
	220	8 x 6.2	0.30	1.9	140	ECA00AE322BA0□
	330	6.3 x 7.7	0.30	1.3	188	ECA00BM333BA0□
	330	8 x 6.2	0.30	1.3	190	ECA00AE333BA0□
	470	8 x 10	0.30	0.9	265	ECA00AF347BA0□
	680	8 x 10	0.30	0.6	290	ECA00AF368BA0□
	1000	10 x 10	0.35	0.5	400	ECA00AG410BA0□
1500	10 x 10	0.35	0.4	450	ECA00AG415BA0□	
10	22	4 x 5.3	0.25	15.4	28	ECA00AB222CA0□
	22	5 x 5.3	0.25	15.4	36	ECA00AC222CA0□
	33	4 x 5.3	0.25	10.3	34	ECA00AB233CA0□
	33	5 x 5.3	0.25	10.3	44	ECA00AC233CA0□
	47	5 x 5.3	0.25	7.2	47	ECA00AC247CA0□
	47	6.3 x 5.3	0.25	7.2	62	ECA00AD247CA0□
	68	6.3 x 5.3	0.25	5.0	66	ECA00AD268CA0□
	100	6.3 x 5.3	0.25	3.4	80	ECA00AD310CA0□
	150	6.3 x 5.8	0.25	2.3	95	ECA00AD315CA0□
	220	6.3 x 7.7	0.25	1.6	173	ECA00BM322CA0□
	220	8 x 6.2	0.25	1.6	175	ECA00AE322CA0□
	330	8 x 10	0.25	1.1	240	ECA00AF333CA0□
	470	8 x 10	0.25	0.8	307	ECA00AF347CA0□
	470	10 x 10	0.25	0.8	330	ECA00AG347CA0□
	680	10 x 10	0.25	0.5	375	ECA00AG368CA0□
	1000	10 x 10	0.25	0.4	454	ECA00AG410CA0□
	15	4 x 5.3	0.20	18.1	26	ECA00AB215DA0□




ELECTRICAL DATA AND ORDERING INFORMATION						
U _R (V)	C _R 120 Hz (μF)	DIMENSIONS D × L (mm)	TAN δ 120 Hz	R _{ESR} 120 Hz (Ω)	I _R 120 Hz/85 °C (mA)	CATALOG NUMBER PART NUMBER*
16	22	4 × 5.3	0.20	12.3	30	ECA00AB222DA0□
	22	5 × 5.3	0.20	12.3	37	ECA00AC222DA0□
	33	5 × 5.3	0.20	8.2	43	ECA00AC233DA0□
	33	6.3 × 5.3	0.20	8.2	58	ECA00AD233DA0□
	47	5 × 5.3	0.20	5.8	52	ECA00AC247DA0□
	47	6.3 × 5.3	0.20	5.8	69	ECA00AD247DA0□
	68	6.3 × 5.3	0.20	4.0	78	ECA00AD268DA0□
	100	6.3 × 5.3	0.20	2.7	88	ECA00AD310DA0□
	100	8 × 6.2	0.20	2.7	130	ECA00AE310DA0□
	150	6.3 × 7.7	0.20	1.8	140	ECA00BM315DA0□
	150	8 × 6.2	0.20	1.8	150	ECA00AE315DA0□
	220	6.3 × 7.7	0.20	1.3	162	ECA00BM322DA0□
	220	8 × 10	0.20	1.3	215	ECA00AF322DA0□
	330	8 × 10	0.20	0.8	270	ECA00AF333DA0□
	330	10 × 10	0.20	0.8	300	ECA00AG333DA0□
	470	10 × 10	0.20	0.6	340	ECA00AG347DA0□
	680	10 × 10	0.20	0.4	385	ECA00AG368DA0□
25	4.7	4 × 5.3	0.16	46	18	ECA00AB147EA0□
	6.8	4 × 5.3	0.16	32	20	ECA00AB168EA0□
	10	4 × 5.3	0.16	22	24	ECA00AB210EA0□
	10	5 × 5.3	0.16	22	30	ECA00AC210EA0□
	15	5 × 5.3	0.16	14.5	35	ECA00AC215EA0□
	22	5 × 5.3	0.16	9.9	41	ECA00AC222EA0□
	22	6.3 × 5.3	0.16	9.9	53	ECA00AD222EA0□
	33	5 × 5.3	0.16	6.6	50	ECA00AC233EA0□
	33	6.3 × 5.3	0.16	6.6	64	ECA00AD233EA0□
	47	6.3 × 5.3	0.16	4.6	70	ECA00AD247EA0□
	68	8 × 6.2	0.16	3.2	100	ECA00AE268EA0□
	100	6.3 × 7.7	0.16	2.2	110	ECA00BM310EA0□
	100	8 × 6.2	0.16	2.2	145	ECA00AE310EA0□
	150	8 × 10	0.16	1.5	190	ECA00AF315EA0□
	220	8 × 10	0.16	1.0	232	ECA00AF322EA0□
	220	10 × 10	0.16	1.0	250	ECA00AG322EA0□
	330	8 × 10	0.16	0.7	275	ECA00AF333EA0□
330	10 × 10	0.16	0.7	305	ECA00AG333EA0□	
470	10 × 10	0.16	0.5	350	ECA00AG347EA0□	
35	4.7	4 × 5.3	0.15	43	18	ECA00AB147FA0□
	6.8	4 × 5.3	0.15	30	21	ECA00AB168FA0□
	6.8	5 × 5.3	0.15	30	25	ECA00AC168FA0□
	10	4 × 5.3	0.15	20.5	27	ECA00AB210FA0□
	10	5 × 5.3	0.15	20.5	32	ECA00AC210FA0□
	15	6.3 × 5.3	0.15	13.6	45	ECA00AD215FA0□
	22	6.3 × 5.3	0.15	9.3	53	ECA00AD222FA0□
	33	6.3 × 5.3	0.15	6.2	60	ECA00AD233FA0□
	47	6.3 × 5.8	0.15	4.3	94	ECA00AD247FA0□
	47	8 × 6.2	0.15	4.3	105	ECA00AE247FA0□
	68	6.3 × 7.7	0.15	3.0	120	ECA00BM268FA0□
	100	6.3 × 7.7	0.15	2.1	132	ECA00BM310FA0□
	100	8 × 10	0.15	2.1	175	ECA00AF310FA0□
	150	8 × 10	0.15	1.4	200	ECA00AF315FA0□
	150	10 × 10	0.15	1.4	220	ECA00AG315FA0□
	220	8 × 10	0.15	1.0	240	ECA00AF322FA0□
	220	10 × 10	0.15	1.0	265	ECA00AG322FA0□
330	10 × 10	0.15	0.7	335	ECA00AG323FA0□	
	0.1	4 × 5.3	0.12	1625	4	ECA00AB010HA0□



ELECTRICAL DATA AND ORDERING INFORMATION						
U _R (V)	C _R 120 Hz (μF)	DIMENSIONS D × L (mm)	TAN δ 120 Hz	R _{ESR} 120 Hz (Ω)	I _R 120 Hz/85 °C (mA)	CATALOG NUMBER PART NUMBER*
50	0.22	4 × 5.3	0.12	740	5	ECA00AB022HA0□
	0.33	4 × 5.3	0.12	495	6	ECA00AB033HA0□
	0.47	4 × 5.3	0.12	345	8	ECA00AB047HA0□
	0.68	4 × 5.3	0.12	239	9	ECA00AB068HA0□
	1.0	4 × 5.3	0.12	163	11	ECA00AB110HA0□
	1.5	4 × 5.3	0.12	109	14	ECA00AB115HA0□
	2.2	4 × 5.3	0.12	74	17	ECA00AB122HA0□
	3.3	4 × 5.3	0.12	50	20	ECA00AB133HA0□
	4.7	4 × 5.3	0.12	35	24	ECA00AB147HA0□
	4.7	5 × 5.3	0.12	35	26	ECA00AC147HA0□
	6.8	5 × 5.3	0.12	24	33	ECA00AC168HA0□
	10	5 × 5.3	0.12	16.5	41	ECA00AC210HA0□
	10	6.3 × 5.3	0.12	16.5	44	ECA00AD210HA0□
	15	6.3 × 5.3	0.12	10.9	58	ECA00AD215HA0□
	22	6.3 × 5.3	0.12	7.4	71	ECA00AD222HA0□
	33	8 × 6.2	0.12	5.0	95	ECA00AE233HA0□
	33	6.3 × 7.7	0.12	5.0	94	ECA00BM233HA0□
	47	6.3 × 7.7	0.12	3.5	105	ECA00BM247HA0□
	47	8 × 10	0.12	3.5	140	ECA00AF247HA0□
	68	8 × 10	0.12	2.4	150	ECA00AF268HA0□
100	8 × 10	0.12	1.7	181	ECA00AF310HA0□	
100	10 × 10	0.12	1.7	195	ECA00AG310HA0□	
150	10 × 10	0.12	1.1	230	ECA00AG315HA0□	
63	10	8 × 6.2	0.12	16.5	46	ECA00AE210JA0□
	22	8 × 10	0.12	7.4	96	ECA00AF222JA0□
	33	8 × 10	0.12	5.0	117	ECA00AF233JA0□
	47	8 × 10	0.12	3.5	150	ECA00AF247JA0□
	100	10 × 10	0.12	1.7	232	ECA00AG310JA0□
100	2.2	5 × 5.3	0.12	74	20	ECA00AC122LA0□
	3.3	6.3 × 5.8	0.12	50	29	ECA00AD133LA0□
	4.7	6.3 × 5.8	0.12	35	35	ECA00AD147LA0□
	4.7	8 × 6.2	0.12	35	40	ECA00AE147LA0□
	10	8 × 10	0.12	16.5	77	ECA00AF210LA0□
	22	8 × 10	0.12	7.4	100	ECA00AF222LA0□
	33	10 × 10	0.12	5.0	130	ECA00AG233LA0□
	47	10 × 10	0.12	3.5	155	ECA00AG247LA0□

REFLOW SOLDERING CONDITIONS FOR SMD ALUMINUM ELECTROLYTIC CAPACITORS

Lead (Pb)-free/RoHS

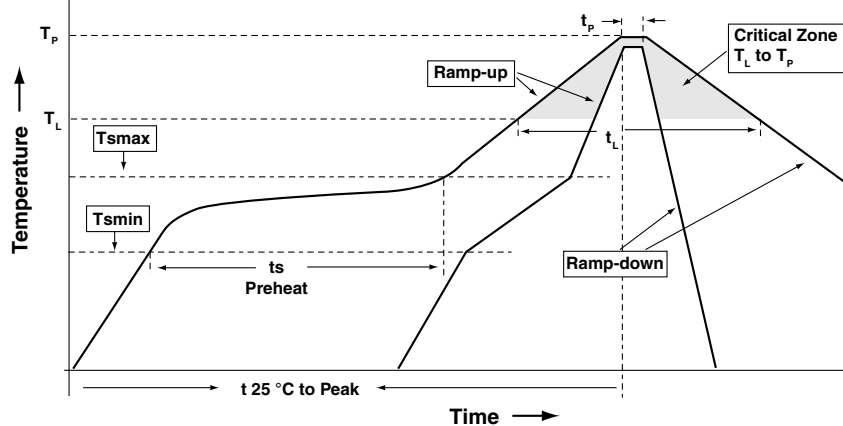

Profile Feature	Lead (Pb)-free/RoHS	
	4 ~ 6.3 φ	8 ~ 10 φ
Average Ramp-up Rate (T _L to T _p)	3 °C/second max.	
Preheat - Temperature Min (T _s min.) - Temperature Max (T _s max.) - Time (T _s min. to T _s max.)	150 °C 200 °C 60 ~ 150 seconds	
T _s max. to T _L - Ramp-up Rate	3 °C/second max.	
Time maintained above: - Temperature (T _L) - Time (T _L)	217 °C 60 ~ 90 seconds	
Peak/Classification Temperature (T _p)	250 °C ± 5 °C	
Time within 5 °C of actual Peak Temperature (T _p)	10 seconds	5 seconds
Ramp-down Rate	3 °C/second max.	
Time 25 °C to Peak Temperature	8 minutes max.	

RESISTANCE TO SOLDERING HEAT	
Leakage current	less than specified value
Capacitance value	within ± 10 % of initial value
Tan δ	less than specified value

LOW TEMPERATURE CHARACTERISTICS

IMPEDANCE RATIO Z(9T2)/Z (T1) AT 120HZ									
T1/T2	RATED VOLTAGE (V)								
	4	6.3	10	16	25	35	50	63	100
- 25 °C/+ 20 °C	6	5	4	3	2	2	2	2	2
- 40 °C/+ 20 °C	12	10	8	6	4	3	3	3	3

ENDURANCE TEST (rated voltage/2000 hours/85 °C)	
Leakage current	less than specified value
Capacitance value	within ± 25 % of initial value
Tan δ	less than 200 % of specified value

LEAKAGE CURRENT

Formula for calculation of the maximum leakage current.

(Test conditions: U_R, 20 °C, 2 resp. 1 minute)

$I_{L1} [\mu A] < 0.03 \cdot C_R [\mu F] \cdot U_R [V]$ (after 1 minute)

$I_{L2} [\mu A] < 0.01 \cdot C_R [\mu F] \cdot U_R [V]$ or 3 μA whichever is greater (after 2 minutes)



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.